SPEC SHEET ENG-1

Quote/Order# _____ **Company Name:** _____

Attention: _____ **Email:** _____

Phone#: _____ **Job Name:** _____

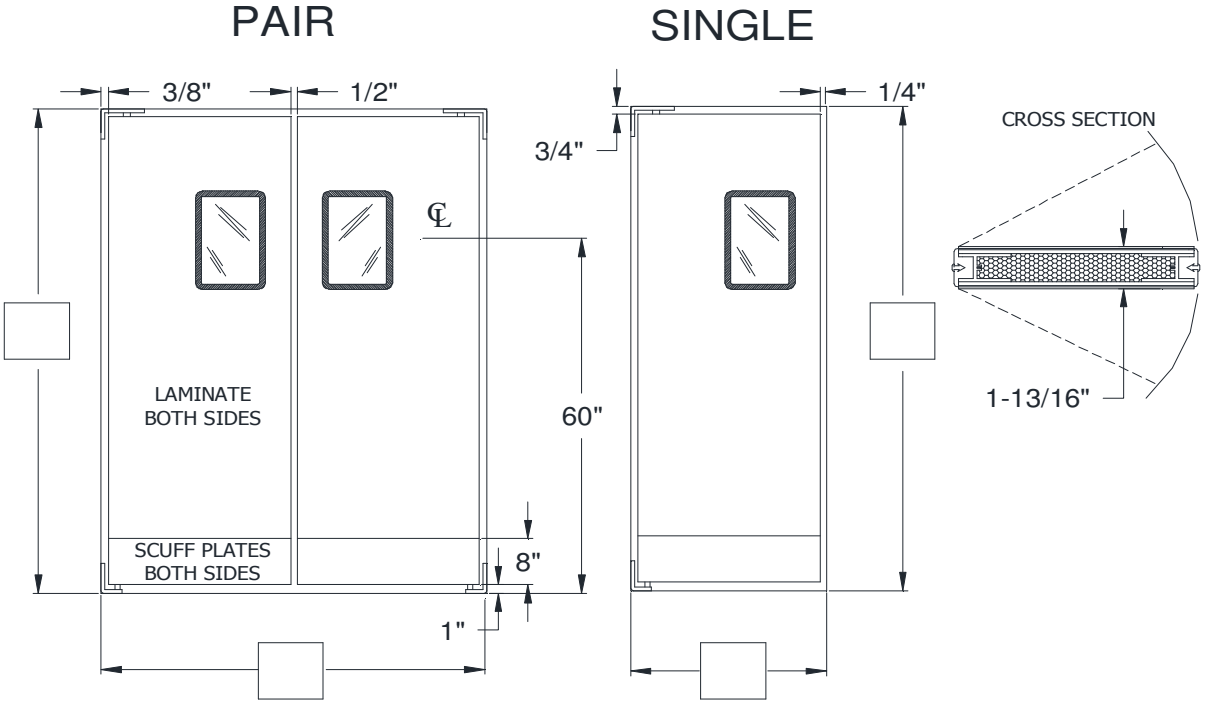

Fill in Opening Size in the Blanks Provided Above

STANDARD SPECIFICATIONS: Door body 1-13/16" thick with laminated high impact, thermoplastic material surface, bonded to a high strength PVC frame with a polymer cell core. 8" high scuff plates. 9" x 14" flush clear acrylic window. Door assembly includes "HIDDEN HARDWARE" Easy Swing® hinges, 1/4" - 20 x 1" thread cutting screws, #14 -1-1/2" sheet metal/wood screws and 3/8" X 2-1/4" rawl bolts for jamb by others.

INSTALLATION DETAILS: Jambs must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jambs should be reinforced at hinge locations.

SPECIFIC DETAILS FOR DOOR CONSTRUCTION:

DOOR FINISH: Specify Laminate: _____.

WINDOW: ☐ Standard 9" X 14" Flush Window, Up 60" to Center of Window from Floor
☐ Other: _____

PLATE: Height: ☐ Standard 8" High ☐ Other Height: _____.
Color/Material: ☐ Standard Black ABS ☐ Stainless Steel ☐ Galvanized Steel
☐ Other_____.

BUMPER: Standard Black Tear Drop Polyethylene, Height: ☐ 12 ☐ 18 ☐ 24 ☐ 30 ☐ 36 ☐ 42
Aluminum Bumper Strip: ☐

OTHER SPECIFICATIONS:_____.

APPROVED BY: _____ **DATE:** _____

Phone: 800-828-3655 **Eliason Corporation** doors@eliasondorp.com Fax: 800-828-3577

Print Reset Save