



SERVICE-PRO® SERIES 30 SWINGING DOOR

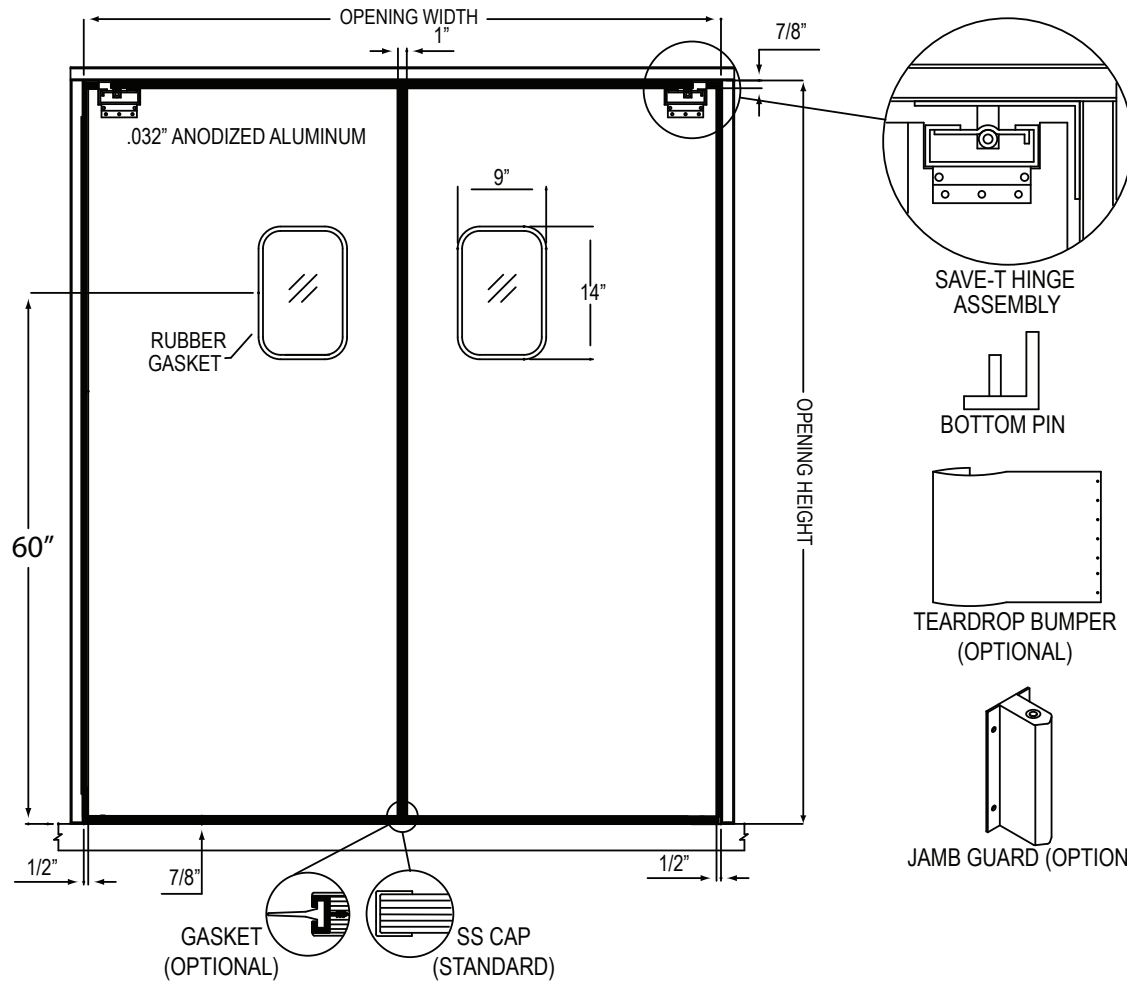

DOOR OPENING DIMENSIONS

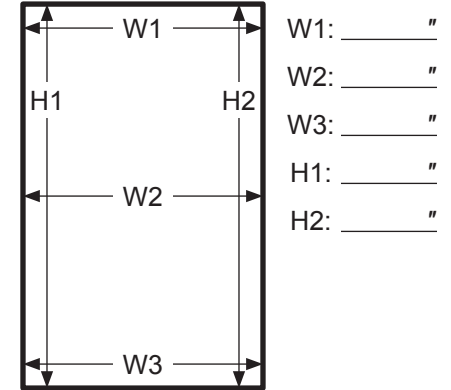

Please Note: These measurements pertain to the door opening, NOT the actual door.

DOOR SPECIFICATION

- Bi-Parting (Double Panel) Single Panel
 Left Right

DOOR MATERIAL/FINISH

- .032" Anodized Aluminum (Standard)
 18 Gauge Stainless Steel
 Laminate Finish
 Black Beige Mid-Tone Wood
 White Light Wood Cherry Wood
 Other: _____

WINDOW SIZE

- 9"x14" (Standard) 10"x30"
 14"x16" 22"x22"
 10" Round 20" Round
Window must be 8" narrower than the door panel width.

IMPACT PLATES

- Stainless Steel Diamond Tread
 .093" ABS .125" ABS
 Teardrop Bumpers
 12" 18" 24" 30" 36" 42" 48"

HARDWARE

- Full Perimeter Gasket
 Save-T Hinge Assembly & Bottom Pin (Standard)
 Stainless Steel Save-T Hinge Assembly & Bottom Pin
 Jamb Guard
 3"x10" Aluminum 3"x10" Stainless Steel
 5"x18" Galvanized Steel
 Push Plates
 ABS Stainless Steel

APPLICABLE MODELS:

SERIES30-AL, SERIES30-L, SERIES30-SS, SERIES30-AL-GASKET, SERIES30-L-GASKET, SERIES30-SS-GASKET

STANDARD SERIES 30 FEATURES:

- 3/4" Exterior Grade Solid Wood Core
- Save-T Hinge Assembly & Bottom Pin
- 9"x14" Window

Pictured: Double Panel SERIES30-AL-GASKET

SIGNATURE REQUIRED

JOB NAME/LOCATION _____

CUSTOMER/LOCATION _____

ORDER # _____ CUSTOMER PO # _____

Charges will be assumed by buyer for changes or cancellations to work in process. Buyer hereby accepts responsibility for all sizes and dimensions. This order will not be processed until all acknowledgment forms are signed and returned.

X _____ DATE _____

Curtron Products, a division of TMI, LLC
5350 Campbells Run Rd • Pittsburgh, PA 15205 • 1.800.833.5005 • 412.787.3665 (fax)